

JOINTEC GE - GEL


PRODUCT DESCRIPTION



JOINTEC GE aluminum structural expansion joints are composed of twin metal profiles joined by a central synthetic rubber insert. Designed to bear loads of large scale buildings or building compounds, they can be installed in the interstitial space between two sections of a building or between two bays. This technical joint links these interspaces, moving vertically and horizontally to accommodate a building's structural and material settlement. The structural bays defined by this profile should be further subdivided with smaller scale movement / expansion joints, chosen according to the expected use and flooring type.

TECHNICAL FEATURES

Length: 13'-1/8" - 4.00 meters

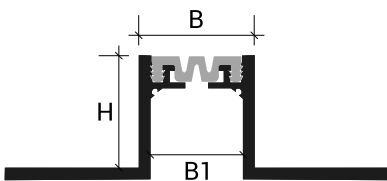


Aluminum + Resinprene Insert

GE mounts the GI370 insert:

B = 1-47/64" - 44 mm

B1 = 1-1/2" - 38 mm

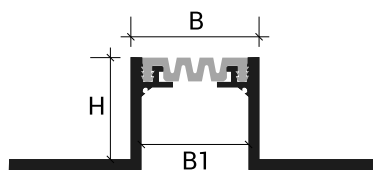

Aluminum + Resinprene Insert

GEL mounts the GI470 insert:

B = 2-1/8" - 54 mm

B1 = 1-7/8" - 48 mm

MATERIAL DESCRIPTION

Aluminum + Resinprene Insert

The primary aluminum alloy EN AW-6060 in T6 temper is suitable for complex extrusions, offering high strength and an excellent natural surface finish that lends itself well to subsequent finishing processes.

RESINPRENE Vulcanized rubber:

Resinprene vulcanized rubber is a modified compound based on EPDM and NEOPRENE whose particular characteristics we highlight:

Optimal mechanical properties in an operating temperature range from -40 °C to + 150 °C

Resistance to aqueous fluids, oils, and hydrocarbons. Low permanent deformation in compression and tension. Excellent resistance to aging. Exceptional resistance to dynamic fatigue and tearing. The intrinsic characteristics of the material make it particularly suitable for the production of profiles requiring high performance over time, both indoors and outdoors.



AN



P23



P51

jointec >> GE in Aluminum + Resinprene insert + GI370		
Item	H inch	Finish
GE200AN23400	3/4	A23 - Cement Grey
GE500AN23400	2	A23 - Cement Grey
GE200AN51400	3/4	A51 - Black
GE500AN51400	2	A51 - Black



The joints are supplied unassembled from the rubber insert.

To order the insert with the smooth surface add the letter S after the article code. Ex: GE500AN51S400.

jointec >> GEL in Aluminum + Resinprene insert + GI470		
Item	H inch	Finish
GEL200AN23400	3/4	A23 - Cement Grey
GEL500AN23400	2	A23 - Cement Grey
GEL200AN51400	3/4	A51 - Black
GEL500AN51400	2	A51 - Black



The joints are supplied unassembled from the rubber insert.

To order the insert with the smooth surface add the letter S after the article code. Ex: GE500AN51S400.

APPLICATION

1. Choose the profile according to the loads and expansion to which it will be subjected. If necessary, level the subfloor using a layer of plastic mortar with a width of 3-15/16" - 10 cm approx. Calculating in advance that when the laying is completed the joint will be perfectly flush with the finished floor;
2. Spread the adhesive in the profile application area with the help of a notched trowel;
3. Cut the profile to the required length;
4. Align the joint, checking that it is perfectly linear. If present, fix the wings to the substrate using mechanical or chemical expansion plugs sized according to the loads and characteristics of the substrate;
5. Fixing must be carried out in parallel on both sides of the profile, positioning, if required, a plug every 30 cm, using the external holes alternately between the two fixing wings;
6. If necessary, depending on the type of wall covering material, a 1/8" - 3 mm to 3/16" - 5 mm elastic seal between the final edge of the wall covering and the profile is recommended.

CLEANING AND MAINTENANCE

ALUMINIUM:

Aluminum requires no special maintenance.

For cleaning, use colorless alcohol diluted in water or neutral detergents, avoiding acidic ones (e.g., hydrochloric or hydrofluoric acid); use non-abrasive sponges or cloths to avoid damage. We recommend not applying cleaners directly to surfaces. After cleaning, rinse with water and dry immediately with a soft cloth. Avoid polishes. Quickly remove residual cement or grout to protect the surface.

WARNINGS

These profiles must be handled with care, taking care to use cut-resistant gloves. The instructions and requirements contained herein, while based on our experience, are to be considered purely indicative and must be confirmed by exhaustive practical applications. Profilitec declines all responsibility for any damage to persons or property resulting from improper use of the product. The user is responsible for determining whether or not the product is suitable for use and assumes all responsibility for any damage resulting from incorrect installation of the material.

Profilitec S.p.A.
Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
Tel: +39 0444 268311
e-mail: profilitec@profilitec.com

Profilitec Corp.
e-mail: customerservice@profilitec.com

Profilitec Ibérica, S.L.U.
e-mail: iberica@profilitec.com

Profilitec France
e-mail: france@profilitec.com

BILL OF QUANTITIES ITEM

Supply and installation of profile in _____ (material), with finish _____
 _____ (see Material Description section) of characteristic size _____ mm, equipped with a
 wide perforated base which facilitates perfect fixing and a safe surface suitable for pedestrian and vehicular passage with
 replaceable rubber insert.

Family type _____ from the Profilitec company as a load-bearing structural joint to be used on
 floors between semi-attached parts of buildings or between different spans, to be supplied and installed according to the
 rules of the art, respecting the methods and fields of application indicated by the manufacturer.

Profile length: 157-15/32" - 4000 mm

Profile SKU: _____

Material: _____ \$/pc

Installation: _____ \$/pc

Totale price: _____ \$/pc

Profilitec S.p.A.
 Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
 Tel: +39 0444 268311
 e-mail: profilitec@profilitec.com

Profilitec Corp.
 e-mail: customerservice@profilitec.com

Profilitec Ibérica, S.L.U.
 e-mail: iberica@profilitec.com

Profilitec France
 e-mail: france@profilitec.com