


LISTEC LI10 - LI10G


PRODUCT DESCRIPTION

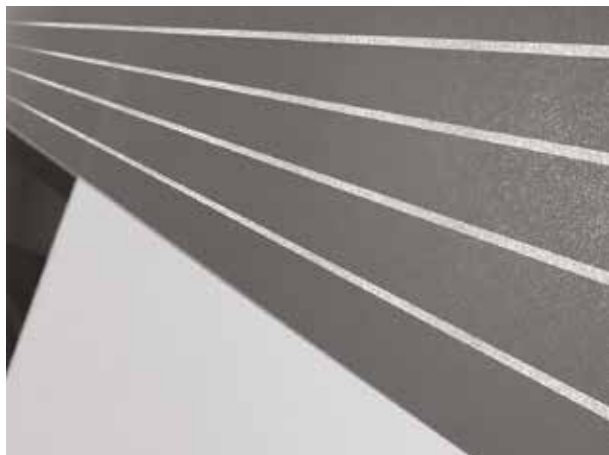


The LISTEC LI 10 aluminum decorative profile is designed for ceramic tile wall coverings. The unique squared section perfectly aligns with modern rectified tile edges. Due to the 5/16" (8mm) profile thickness and interlocking plastic spacers, the strip profile is adaptable to any tile thickness over 1/4" (7mm). For information on the plastic spacers (LIA.

TECHNICAL FEATURES

Length: 2.70 meters - 8'10"



Aluminum



Glitter Aluminum

MATERIAL DESCRIPTION

Aluminum

The primary aluminum alloy EN AW-6060 in T6 temper is suitable for complex extrusions, offering high strength and an excellent natural surface finish that lends itself well to subsequent finishing processes.

ANODIZED ALUMINUM:

The anodic oxidation process provides protection against corrosion caused by atmospheric agents, without involving galvanic treatments.

According to the EN 12373 standard, the profiles are treated with preventive processes that make them uniformly opaque, subsequently they are coloured through an electro-chemical oxidation process in the standard colours Silver, Gold, Bronze, Copper and Titanium with a thickness of up to 10 microns.

BRIGHT POLISHED ALUMINUM:

The brightening process consists of a mechanical-chemical polishing treatment and the subsequent anodic bath in Gold, Chrome, Copper and Titanium colors. The resulting profiles retain the same corrosion resistance as standard anodized profiles.



AS



ASS



ASB

listec >> LI in Anodized Aluminum		
Item	HxB inch	Finish
LI10AS270	5/16x3/8	AS - Silver

listec >> LI in Brushed Anodized Aluminum		
Item	HxB inch	Finish
LI10ASS270	5/16x3/8	ASS - Brushed silver

listec >> LI10 in Bright Polished Anodized Aluminum		
Item	HxB inch	Finish
LI10ASB270	5/16x3/8	ASB - Chrome

Aluminum Glitter



AGS



AGC



AGO

listec >> LI in Anodized Aluminum Glitter		
Item	HxB inch	Finish
LI10AGS270	5/16x3/8	AGS - Glitter silver
LI10AGC270	5/16x3/8	AGC - Glitter Carbon
LI10AGO270	5/16x3/8	AGO - Glitter Gold

APPLICATION

1. Choose the H-size profile corresponding to the thickness of the tile to be laid, taking care to ensure that the profile does not exceed the edge of the floor but is positioned 0.5 to 1 mm lower.
2. Spread the adhesive in the profile application area with the help of a notched trowel;
3. Cut the profile to the required length and place it so that the base sinks into the adhesive, pressing and aligning it;
4. Apply an additional layer of adhesive to the perforation and in the cavities of the vertical section of the profile in contact with the edge of the floor;
5. Generally leave a space of about 3/32" - 2 mm between the profile and the edge of the tile to be filled later with sealant or grout;
6. Remove any adhesive residue from the profile immediately.

N.B.: Aluminum profiles offer limited resistance to alkaline substances, so their use must be evaluated according to the expected chemical aggressions. Aluminum profiles in contact with cementitious substances can be attacked by corrosion processes, so residues of used adhesives and sealants should be removed immediately. When laying, the right amount of adhesive must be used and the right drying times observed, avoiding creating cavities in which water can stagnate, which would lead to the formation of alkaline substances (aluminum hydroxide) and trigger corrosive electrolytic phenomena.

CLEANING AND MAINTENANCE

ALUMINIUM:

Aluminum requires no special maintenance.

For cleaning, use colorless alcohol diluted in water or neutral detergents, avoiding acidic ones (e.g., hydrochloric or hydrofluoric acid); use non-abrasive sponges or cloths to avoid damage. We recommend not applying cleaners directly to surfaces. After cleaning, rinse with water and dry immediately with a soft cloth. Avoid polishes. Quickly remove residual cement or grout to protect the surface.

Profilitec S.p.A.
 Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
 Tel: +39 0444 268311
 e-mail: profilitec@profilitec.com

Profilitec Corp.
 e-mail: customerservice@profilitec.com

Profilitec Ibérica, S.L.U.
 e-mail: iberica@profilitec.com

Profilitec France
 e-mail: france@profilitec.com

WARNINGS

These profiles must be handled with care, taking care to use cut-resistant gloves. The instructions and requirements contained herein, while based on our experience, are to be considered purely indicative and must be confirmed by exhaustive practical applications. Profilitec declines all responsibility for any damage to persons or property resulting from improper use of the product. The user is responsible for determining whether or not the product is suitable for use and assumes all responsibility for any damage resulting from incorrect installation of the material.

BILL OF QUANTITIES ITEM

Supply and installation of profile in _____ (material), with finish _____
 _____ (see Material Description section) of characteristic size _____ mm, with hollow internal
 part for better glue grip.

Family type _____ from the Profilitec company as a closing and protection profile for the covering
 even after installation, to be supplied and installed according to the rules of the art, respecting the methods and fields of
 application indicated by the manufacturer.

Profile length: 2700 mm

Profile SKU: _____

Material: _____ \$/pc

Installation: _____ \$/pc

Totale price: _____ \$/pc

Profilitec S.p.A.
 Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
 Tel: +39 0444 268311
 e-mail: profilitec@profilitec.com

Profilitec Corp.
 e-mail: customerservice@profilitec.com

Profilitec France
 e-mail: france@profilitec.com

Profilitec Ibérica, S.L.U.
 e-mail: iberica@profilitec.com