

MULTICLIP LVT CLF

PRODUCT DESCRIPTION





Patented profile designed to accommodate flooring height differences of 0" to 1/4" (0 to 6 mm).

The plastic modular insert makes MULTICLIP a durable and highly wear resistant transition system that also allows for movement. The versatility of the visible cap easily and seamlessly adapts to slight height differences between flooring materials.

TECHNICAL FEATURES

Length: 2.70 meters - 8'10"

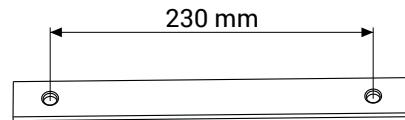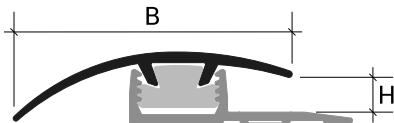

Aluminum

H = 5/32" to 1/4" - 4 to 6 mm

MATERIAL DESCRIPTION

Aluminum

The primary aluminum alloy EN AW-6060 in T6 temper is suitable for complex extrusions, offering high strength and an excellent natural surface finish that lends itself well to subsequent finishing processes.

ANODIZED ALUMINUM:

The anodic oxidation process provides protection against corrosion caused by atmospheric agents, without involving galvanic treatments.

According to the EN 12373 standard, the profiles are treated with preventive processes that make them uniformly opaque, subsequently they are coloured through an electro-chemical oxidation process in the standard colours Silver, Gold, Bronze, Copper and Titanium with a thickness of up to 10 microns.

SUBLIMATED ALUMINUM:

The finish obtained through the painting and sublimation process is a process that consists of a first phase corresponding to the powder coating process and a second phase that uses sublimation transfer technology. This allows images or decorations to be transferred from a film to an object, usually metal, using heat and pressure, creating a high-quality and durable aesthetic finish.

In addition to presenting realistic decorative effects, it also retains the characteristics of an electrostatic painting based on polyester powders.



multiclip LVT >> CLF320 in Anodized Aluminum		
Item	B inch	Finish
CLF320AS270	1-1/4	AS - Silver
CLF320AO270	1-1/4	AO - Gold
CLF320AB270	1-1/4	AB - Bronze

multiclip LVT >> CLF320 in High resistance Wood Laminated Aluminum		
Item	B inch	Finish
CLF320RS270	1-1/4	RS - Bleached
CLF320AC270	1-1/4	AC - Maple
CLF320FA270	1-1/4	FA - Beechwood
CLF320RO270	1-1/4	RO - Oak
CLF320CI270	1-1/4	CI - Cherry
CLF320NC270	1-1/4	NC - Light Walnut
CLF320NS270	1-1/4	NS - Dark Walnut
CLF320WE270	1-1/4	WE - Wengé
CLF320RW270	1-1/4	RW - Wengè Oak
CLF320RD270	1-1/4	RD - Decapè Oak
CLF320RG270	1-1/4	RG - Grey Oak

APPLICATION

1. Choose the MULTICLIP profile (finishing), the CLB profile (base) and the CL profile (adjustment clip).
2. Cut the profiles to the desired length;
3. Spread the adhesive in the application area of the base or fix it with screws;
4. Lay the floors by resting them on the sides of the base, leaving the space that will house the CL profile (clip) free;
5. Insert the CL profile into the appropriate dovetail slot of the MULTICLIP finishing profile;
6. Finally, fit the newly coupled profiles (MULTICLIP + CL) into the base (CLB) by applying progressively greater pressure, for example by placing a wooden board on the profile and hitting it lightly with a rubber hammer.

N.B.: Aluminum profiles offer limited resistance to alkaline substances, so their use must be evaluated according to the expected chemical aggressions. Aluminum profiles in contact with cementitious substances can be attacked by corrosion processes, so residues of adhesives and sealants used must be removed immediately. When laying, the right amount of adhesive must be used and the right drying times observed, avoiding creating cavities in which water can stagnate, which would lead to the formation of alkaline substances (aluminum hydroxide) and trigger corrosive electrolytic phenomena.

(The perforated version of the base has a center distance of 9" - 230 mm between successive holes)

CLEANING AND MAINTENANCE

ALUMINUM:

Aluminum requires no special maintenance.

For cleaning, use colorless alcohol diluted in water or neutral detergents, avoiding acidic ones (e.g., hydrochloric or hydrofluoric acid); use non-abrasive sponges or cloths to avoid damage. We recommend not applying cleaners directly to surfaces. After cleaning, rinse with water and dry immediately with a soft cloth. Avoid polishes. Quickly remove residual cement or grout to protect the surface.

WARNINGS

These profiles must be handled with care, taking care to use cut-resistant gloves. The instructions and requirements contained herein, while based on our experience, are to be considered purely indicative and must be confirmed by exhaustive practical applications. Profilitec declines all responsibility for any damage to persons or property resulting from improper use of the product. The user is responsible for determining whether or not the product is suitable for use and assumes all responsibility for any damage resulting from incorrect installation of the material.

BILL OF QUANTITIES ITEM

Supply and installation of profile in _____ (material), with finish _____
_____ (see Material Description section) of characteristic size _____ mm. Profile system
consisting of a base, connecting clip and floor covering and finishing profile.

Family type _____ from the Profilitec company as a joining, connection and finishing profile
between floors of different thicknesses, to be supplied and installed properly, following the methods and fields of
application suggested by the manufacturer.

Profile length: 2700 mm

Profile SKU: _____

Material: _____ \$/pc

Installation: _____ \$/pc

Total price: _____ \$/pc