


SANITEC SB12


PRODUCT DESCRIPTION

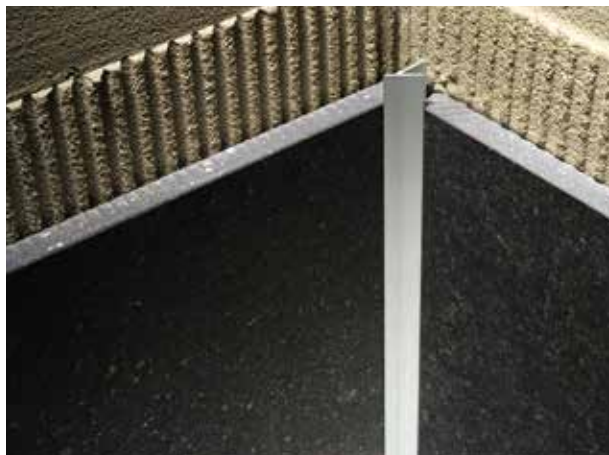

SANITEC SB 12 profiles resolve wall-to-wall or wall-to-floor transitions. The cove-shaped profile is easy to clean and offers a hygienic solution to internal corners in kitchen countertops, shower stalls and bathtubs, replacing silicone caulking that inevitably yellows and absorbs dirt over time.

TECHNICAL FEATURES

Length: 2.70 meters - 8'10"



Aluminum

MATERIAL DESCRIPTION

Aluminum

The primary aluminum alloy EN AW-6060 in T6 temper is suitable for complex extrusions, offering high strength and an excellent natural surface finish that lends itself well to subsequent finishing processes.

ANODIZED ALUMINUM:

The anodic oxidation process provides protection against corrosion caused by atmospheric agents, without involving galvanic treatments.

According to the EN 12373 standard, the profiles are treated with preventive processes that make them uniformly opaque, subsequently they are coloured through an electro-chemical oxidation process in the standard colours Silver, Gold, Bronze, Copper and Titanium with a thickness of up to 10 microns.



AS



ASB

sanitec >> SB 12 in Anodized Aluminum		
Item	HxB inch	Finish
SB12AS270	9/32x15/32	AS - Silver

sanitec >> SB 12 in Bright Polished Anodized Aluminum		
Item	HxB inch	Finish
SB12ASB270	9/32x15/32	ASB - Chrome

APPLICATION

1. Choose the desired material and finish profile;
2. Cut to the desired length;
3. Thoroughly clean the surfaces that will be covered by the profile after installation;
4. Fill the joint space with FIXXTEC or with the adhesive used for laying the floor;
5. Sink the profile into the adhesive, making sure that both lateral overlaps of the profile rest on the coverings to be joined;
6. Apply and maintain uniform pressure for a few minutes along the entire profile to optimize adhesion to the installation surface.

N.B.: Aluminum profiles offer limited resistance to alkaline substances, so their use must be evaluated according to the expected chemical aggressions. Aluminum profiles in contact with cementitious substances can be attacked by corrosion processes, so residues of used adhesives and sealants should be removed immediately. When laying, the right amount of adhesive must be used and the right drying times observed, avoiding creating cavities in which water can stagnate, which would lead to the formation of alkaline substances (aluminum hydroxide) and trigger corrosive electrolytic phenomena.

CLEANING AND MAINTENANCE

ALUMINIUM:

Aluminum requires no special maintenance.

For cleaning, use colorless alcohol diluted in water or neutral detergents, avoiding acidic ones (e.g., hydrochloric or hydrofluoric acid); use non-abrasive sponges or cloths to avoid damage. We recommend not applying cleaners directly to surfaces. After cleaning, rinse with water and dry immediately with a soft cloth. Avoid polishes. Quickly remove residual cement or grout to protect the surface.

WARNINGS

These profiles must be handled with care, taking care to use cut-resistant gloves. The instructions and requirements contained herein, while based on our experience, are to be considered purely indicative and must be confirmed by exhaustive practical applications. Profilitec declines all responsibility for any damage to persons or property resulting from improper use of the product. The user is responsible for determining whether or not the product is suitable for use and assumes all responsibility for any damage resulting from incorrect installation of the material.

BILL OF QUANTITIES ITEM

Supply and installation of profile in _____ (material), with finish _____ (see Material Description section) of characteristic size _____ mm, equipped with an anti-slip foot which guarantees perfect grip with the installation adhesive.

Family type _____ by the Profilitec company as a sanitary cove to be applied as a connection between the wall and the bathtub or shower, to be supplied and installed according to the rules of the art, respecting the methods and fields of application indicated by the manufacturer.

Profile length: 2700 mm

Profile SKU: _____

Material: _____ \$/pc

Installation: _____ \$/pc

Totale price: _____ \$/pc

Profilitec S.p.A.
Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
Tel: +39 0444 268311
e-mail: profilitec@profilitec.com

Profilitec Corp.
e-mail: customerservice@profilitec.com

Profilitec Ibérica, S.L.U.
e-mail: iberica@profilitec.com

Profilitec France
e-mail: france@profilitec.com