


APPENDO APP


PRODUCT DESCRIPTION

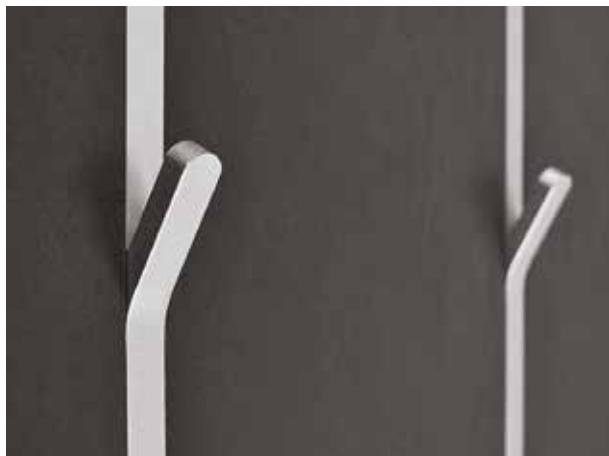

APPENDO is a patented, innovative vertical profile shaped as a hook, a perfect decorative and functional solution for bathrooms and residential settings. The profile is installed with anchoring plates. Spacer washers are included to adapt the profile thickness from 8 to 12mm.

TECHNICAL FEATURES

Length: 2,70 meters



Aluminum

H1 = 45 mm

MATERIAL DESCRIPTION

Aluminum

The primary aluminum alloy EN AW-6060 in T6 temper is suitable for complex extrusions, offering high strength and an excellent natural surface finish that lends itself well to subsequent finishing processes.

ANODIZED ALUMINUM:

The anodic oxidation process provides protection against corrosion caused by atmospheric agents, without involving galvanic treatments.

According to the EN 12373 standard, the profiles are treated with preventive processes that make them uniformly opaque, subsequently they are coloured through an electro-chemical oxidation process in the standard colours Silver, Gold, Bronze and Titanium with a thickness of up to 10 microns.

BRIGHT POLISHED ALUMINUM:

The brightening process consists of a mechanical-chemical polishing treatment and the subsequent anodic bath in Gold, Chrome, Copper and Titanium colors. The resulting profiles retain the same corrosion resistance as standard anodized profiles.



ASB



ASXB



ACXB

appendo >> APP in Bright Polished Anodized Aluminum		
Item	HxB mm	Finish
APP15ASB270	8x15	ASB - Chrome

appendo >> APP in Bright Sanded Anodized Aluminum		
Item	HxB mm	Finish
APP15ASXB270	8x15	ASXB - Sand. brig. pol. silver
APP15ACXB270	8x15	ACXB - Champagne

APPLICATION

1. Choose the mounting height of the hook from the floor and then mark it on the profile, measuring it from the end of the hook;
2. Cut the profile, taking care to protect it so as not to damage the surface in the cutting area;
3. The cut piece will then be used to complete the finish of the strip, starting from the hook and working upwards to the end of the covering;
4. If the cladding is less than 2,7 m high, cut off the excess finishing profile;
5. Mount the fixing plates with the appropriate screws according to the installation instructions provided in the accessory bag inside the product packaging;
6. Secure the plates to the wall with dowels and then proceed with installing the cladding.

N.B.: Aluminum profiles offer limited resistance to alkaline substances, so their use must be evaluated according to the expected chemical aggressions. Aluminum profiles in contact with cementitious substances can be attacked by corrosion processes, so residues of used adhesives and sealants should be removed immediately. When laying, the right amount of adhesive must be used and the right drying times observed, avoiding creating cavities in which water can stagnate, which would lead to the formation of alkaline substances (aluminum hydroxide) and trigger corrosive electrolytic phenomena.

CLEANING AND MAINTENANCE

ALUMINIUM:

Aluminum requires no special maintenance.

For cleaning, use colorless alcohol diluted in water or neutral detergents, avoiding acidic ones (e.g., hydrochloric or hydrofluoric acid); use non-abrasive sponges or cloths to avoid damage. We recommend not applying cleaners directly to surfaces. After cleaning, rinse with water and dry immediately with a soft cloth. Avoid polishes. Quickly remove residual cement or grout to protect the surface.

WARNINGS

These profiles must be handled with care, taking care to use cut-resistant gloves. The instructions and requirements contained herein, while based on our experience, are to be considered purely indicative and must be confirmed by exhaustive practical applications. Profilitec declines all responsibility for any damage to persons or property resulting from improper use of the product. The user is responsible for determining whether or not the product is suitable for use and assumes all responsibility for any damage resulting from incorrect installation of the material.



BILL OF QUANTITIES ITEM

Supply and installation of profile in _____ (material), with finish _____
_____ (see Material Description section) with characteristic dimensions _____ mm, with
mounting bracket accessories for better glue adhesion.

Profilitec family type _____ as a vertical decorative profile for cladding with a hook function to be
supplied and installed in a workmanlike manner in accordance with the methods and fields of application indicated by the
manufacturer.

Profile length: 2700 mm

Profile SKU: _____

Material: _____ €/m

Installation: _____ €/m

Total price: _____ €/m