


## COPRITEC CPM

### PRODUCT DESCRIPTION

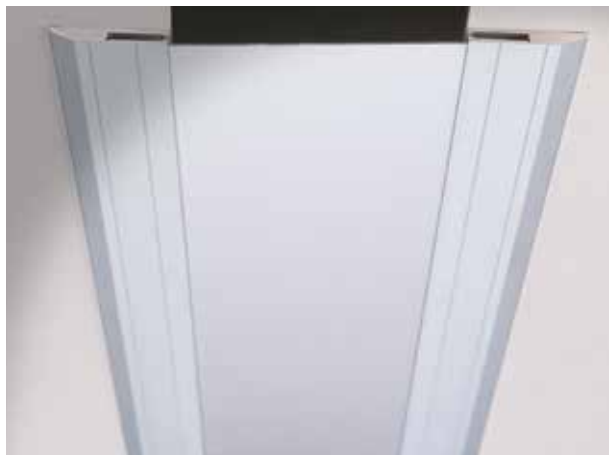

These are modular expansion joint covers, patented custom-made according to the required widths. They are particularly suitable as expansion joint covers for walls or ceilings, supplied both in the flat and in the corner version. This profile consists of two lateral elements which work both as a fixing system, with screws and dowels, and as restraining and movement devices for the aluminium profile, which is custom-made according to the required width. They are supplied in Silver anodised aluminium.

### TECHNICAL FEATURES


Length: 2,70 meters



Aluminum - CPM 450 AS



Aluminum - CPML/AS  
 $B = L + 13 \text{ mm} + 13 \text{ mm}$

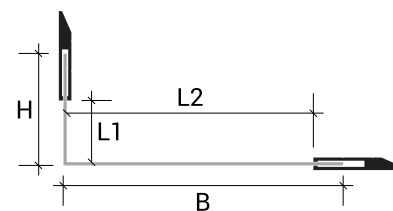

-  
 $H = L1 + 13 \text{ mm}$   
 $B = L2 + 13 \text{ mm}$

### MATERIAL DESCRIPTION

#### Aluminum

The primary aluminum alloy EN AW-6060 in T6 temper is suitable for complex extrusions, offering high strength and an excellent natural surface finish that lends itself well to subsequent finishing processes.

#### ANODIZED ALUMINUM:

The anodic oxidation process provides protection against corrosion caused by atmospheric agents, without involving galvanic treatments.

According to the EN 12373 standard, the profiles are treated with preventive processes that make them uniformly opaque, subsequently they are coloured through an electro-chemical oxidation process in the standard colours Silver, Gold, Bronze, Copper and Titanium with a thickness of up to 10 microns.



AS

copritec >> CPM Fixing module in Anodized Aluminum for modular expansion joints		
Item	HxB mm	Finish
CPM450AS270	6x45	AS - Silver

copritec >> CPM Anodized Aluminum cover profile for modular joint covers	
Item	Finish
CPML/AS270	AS - Silver
CPMP/AS270	AS - Silver



## APPLICATION

1. Choose the profile according to the loads and expansion to which it will be subjected. If necessary, level the subfloor using a layer of plastic mortar with a width of 10 cm approx. Calculating in advance that when the laying is completed the joint will be perfectly flush with the finished floor;
2. Spread the adhesive in the profile application area with the help of a notched trowel;
3. Cut the profile to the required length;
4. Align the joint, checking that it is perfectly linear. If present, fix the wings to the substrate using mechanical or chemical expansion plugs sized according to the loads and characteristics of the substrate;
5. Fixing must be carried out in parallel on both sides of the profile, positioning, if required, a plug every 30 cm, using the external holes alternately between the two fixing wings;
6. If necessary, depending on the type of wall covering material, a 3 to 5 mm elastic seal between the final edge of the wall covering and the profile is recommended.

N.B.: Aluminum profiles offer limited resistance to alkaline substances, so their use must be evaluated according to the expected chemical aggressions. Aluminum profiles in contact with cementitious substances can be attacked by corrosion processes, so residues of adhesives and sealants used must be removed immediately. When laying, the right amount of adhesive must be used and the right drying times observed, avoiding creating cavities in which water can stagnate, which would lead to the formation of alkaline substances (aluminum hydroxide) and trigger corrosive electrolytic phenomena.

## CLEANING AND MAINTENANCE

### ALUMINIUM:

Aluminum requires no special maintenance.

For cleaning, use colorless alcohol diluted in water or neutral detergents, avoiding acidic ones (e.g., hydrochloric or hydrofluoric acid); use non-abrasive sponges or cloths to avoid damage. We recommend not applying cleaners directly to surfaces. After cleaning, rinse with water and dry immediately with a soft cloth. Avoid polishes. Quickly remove residual cement or grout to protect the surface.

## WARNINGS

These profiles must be handled with care, taking care to use cut-resistant gloves. The instructions and requirements contained herein, while based on our experience, are to be considered purely indicative and must be confirmed by exhaustive practical applications. Profilitec declines all responsibility for any damage to persons or property resulting from improper use of the product. The user is responsible for determining whether or not the product is suitable for use and assumes all responsibility for any damage resulting from incorrect installation of the material.

## BILL OF QUANTITIES ITEM

Supply and installation of profile in \_\_\_\_\_ (material), with finish \_\_\_\_\_  
 \_\_\_\_\_ (see Material Description section) of characteristic size \_\_\_\_\_ mm, equipped with a  
 sheet metal housing suitable as an expansion joint cover for walls or ceilings.

Family type \_\_\_\_\_ from the Profilitec company as a support for joint covers to be used on ceilings  
 or walls, to be supplied and installed according to the rules of the art, respecting the methods and fields of application  
 indicated by the manufacturer.

Profile length: 4000 mm

Profile SKU: \_\_\_\_\_

Material: \_\_\_\_\_ €/m

Installation: \_\_\_\_\_ €/m

Totale price: \_\_\_\_\_ €/m

**Profilitec S.p.A.**  
 Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY  
 Tel: +39 0444 268311  
 e-mail: [profilitec@profilitec.com](mailto:profilitec@profilitec.com)

**Profilitec Corp.**  
 e-mail: [customerservice@profilitec.com](mailto:customerservice@profilitec.com)

**Profilitec France**  
 e-mail: [france@profilitec.com](mailto:france@profilitec.com)

**Profilitec Ibérica, S.L.U.**  
 e-mail: [iberica@profilitec.com](mailto:iberica@profilitec.com)