




“Invisible” **COFLEX CAJ** expansion joints entirely integrate into the 5mm grout width. The profiles in co-extruded synthetic resin are composed of rigid, perforated anchoring flanges and a durable, soft upper surface which is resistant to mildew, bacteria, weathering, corrosion, wear and UV rays. They are conceived to subdivide large tile bays in ceramic tile flooring. Suitable for indoor and outdoor applications; the profile section provides limited protection to the tile edge. Ideally used in retail shops, hotels, sports facilities and schools. Suggested floor bays: 24800-3/64” (16m<sup>2</sup>).


# coflex CAJ

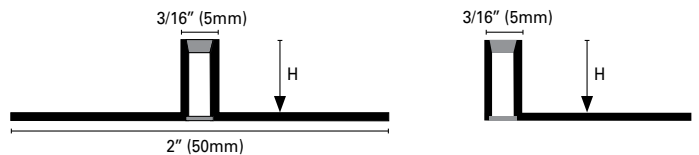

(CAJ 100\*)

### INSTALLATION:

- Select the profile according to the tile thickness. The movement joint should remain 3/16" +/- 1/32" (5 +/- 1mm) below the floor elevation.
- Apply tile adhesive to the substrate.
- Position the movement joint in correspondence with the expansion joints in the underlying substrate. AF: This is not an appropriate procedure. Cutting in to mortar beds or substrates more than 12 hours after a pour is ineffective.
- Lay tiles flush against the perforated flanges.
- Completely fill the residual space between the profile and tile with grout.

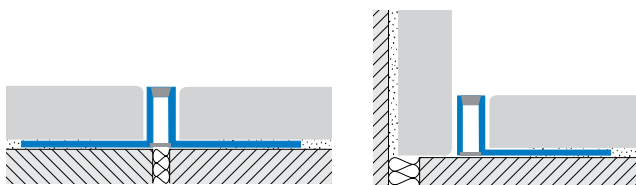

### COFLEX CAJ-P\* Co-Extruded Synthetic Resin

This synthetic resin profile is highly flexible, durable and tolerant to corrosion. The available color range allows the designer to coordinate the profile with tiles and grout. Suitable for indoor and outdoor applications.



	H = in	mm	Art.		
Material:	3/16	4.5	CAJ	45	P11/P23/P32/P51
Resinflex + Resinil	1/4	6	CAJ	60	P11/P23/P32/P51
Color*: Pure White (P11), Cement Grey (P23), Dark Beige (P32), Black (P51)	5/16	8	CAJ	80	P11/P23/P32/P51
	3/8	10	CAJ	100	P11/P23/P32/P51
	1/2	12.5	CAJ	125	P11/P23/P32/P51
Length: 8'10" (2.70meters)					
☒ "ultra-thin" line					

### COFLEX CAJP-P23 Perimeter joint in Synthetic Resin

This perimeter expansion joint for ceramic tile flooring is applicable around room perimeters, and along door/window frames and building thresholds.



Material:	3/16	4.5	CAJP	45	P23
Resinflex + Resinil	1/4	6	CAJP	60	P23
Color:	5/16	8	CAJP	80	P23
Cement Grey (P23)	3/8	10	CAJP	100	P23
	1/2	12.5	CAJP	125	P23
Length: 8'10" (2.70meters)					
☒ "ultra-thin" line					