




# coflex CBR

**COFLEX CBR** is composed of a twin double metal profile to host the internal rubber seal. This product has been designed to ensure a certain grade of protection to the tile and relative work load it may have to bear. The synthetic rubber insert efficiently compensates and absorbs flooring movements along with the covering material. **COFLEX CBR** is suitable to bear distributed weights and tensions. Select a joint with the height matching exactly the tile thickness, the joint must not rise above the level of covering surface but should be laid 0,5 ÷ 1 mm below the edge of the tiles. Suggested flooring bays 10-25 m<sup>2</sup> (as per standard UNI 11499:2013). Typical flooring areas: retail shops, hotels, sporting centers and schools.

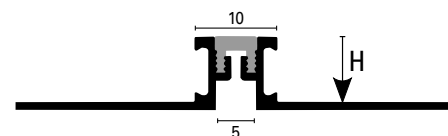

(CBR 100\*)



## COFLEX CBR-AN\* Aluminium + synthetic insert

The aluminium profile is generally advised for indoor laying jobs and in areas which are less subject to mechanical impact and stress.



	H=mm		Art.	
Material: Aluminium extruded	4,5	CBR	45	AN 23/51
	6	CBR	60	AN 23/51
Finish: Natural (AN)	8	CBR	80	AN 23/51
	10	CBR	100	AN 23/51
	12,5	CBR	125	AN 23/51
Insert*: Resinil + Resinflex Cement grey (23), Black (51)	20	CBR	200	AN 23/51
	Length: 2,70 metres			

## COFLEX CBRI - P\* Spare synthetic insert

Made of soft synthetic resin. In case it should look worn out over time just replace the insert with a slight leverage starting from the metal profile ends.

	Colour		Art.	
Material: Resinil + Resinflex	23 / 51	CBRI	5	P23/P51
Insert*: Cement grey (23), Black (51)				
Length: 2,70 metres				