

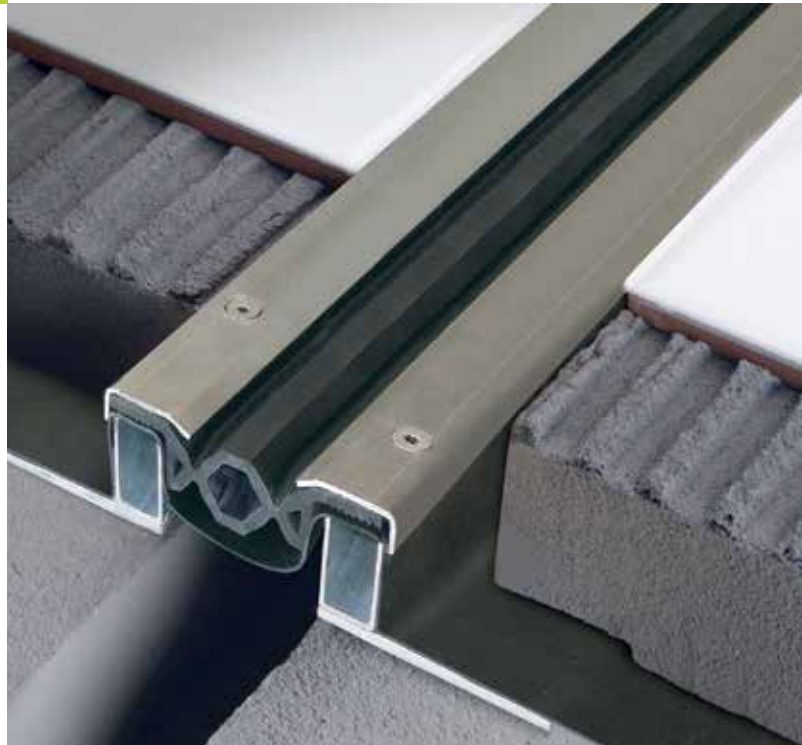


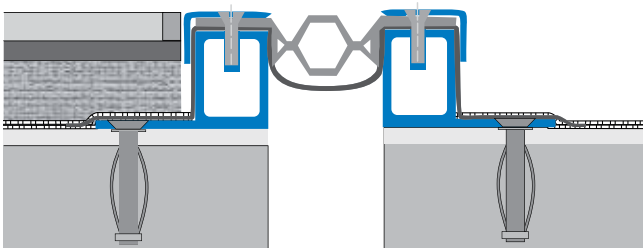

jointec GW

JOINTEC GW stainless steel profiles are waterproof, structural expansion joints manufactured in solid, high carbon steel, anti-vibration rubber, a continuous stabilized rubber insert, and an additional waterproof membrane compatible with PVC and hot/cold-applied bituminous membranes. They are designed for all types of forklift passage. The rubber insert may be easily replaced without damaging the waterproof membrane. Suitable for all types of flooring. Ideally used in parking lots, underground and above ground parking garages, and all industrial areas. Detailed installation instructions supplied upon request.

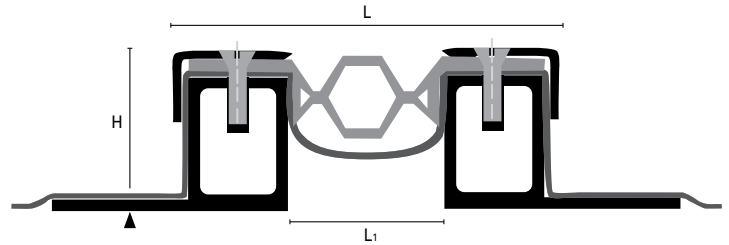

JOINTEC GW-IN Stainless Steel

Profile Width = 5-5/16" (135mm), bridges an 3-1/8" (80mm) gap.
Galvanized steel structure with AISI 304 stainless steel surface plates.



	H = in	mm	L1 = in	mm	L = in	mm	Finish	Art.		
Material: Stainless steel	2-1/8	54	3-1/8	80	5-5/16	135	St. steel +Insert	GW	540	IN 51
	2-33/64	64	3-1/8	80	5-5/16	135	St. steel +Insert	GW	640	IN 51
	2-45/64	94	3-1/8	80	5-5/16	135	St. steel +Insert	GW	940	IN 51
Finish: Natural (IN)										
Insert: Resinprene + Waterproof membrane Wolfin										
Length: 9' 10" (3.00meters)										