



linetec AD

LINETEC AD is a decorative profile for thin-set installations with a minimal surface width of 3/16" (5mm). Its 3/16" (4mm) vertical head allows on-site floor polishing and the arrow-shaped vertical flange ensures mechanical bonding with the floor adhesive. This profile is ideally used with natural stone and wood flooring.



(AD 10*)

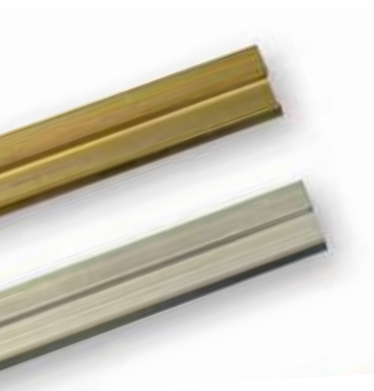

LINETEC AD-ON Natural Brass

Due to the intrinsic qualities of the material and its unique shape, this brass profile guarantees resistance to chemical and mechanical stress and wear. It is used indoors and outdoors, particularly suitable for areas with heavy, industrial traffic as well as for elegant residential detailing. Moisture and corrosive agents may oxidize the exposed surfaces. Buffing the profile with conventional polisher will bring back its shine in no time.

LINETEC AD 10 AN Natural Aluminum

This profile is produced in conformity with UNI standards. It has limited mechanical and chemical resistance. During installation, excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change color or darken over time. Brass profiles are recommended for outdoors and high traffic areas.

	BxH = in	mm	Art.		
Material:	3/16x3/8	5x10	AD	10	ON
Extruded Brass	3/16x17/32	5x14	AD	14	ON
Finish: Natural (ON)					
Length: 8'10" (2.70meters)					
Width: 3/16" (5mm)					
Height: 3/8" and 17/32" (10mm and 14mm)					

Material:	3/16x3/8	5x10	AD	10	AN
Extruded Aluminum					
Finish: Natural (AN)					
Length: 8'10" (2.70meters)					
Width: 3/16" (5mm)					
Height: 3/8" and 17/32" (10mm and 14mm)					