



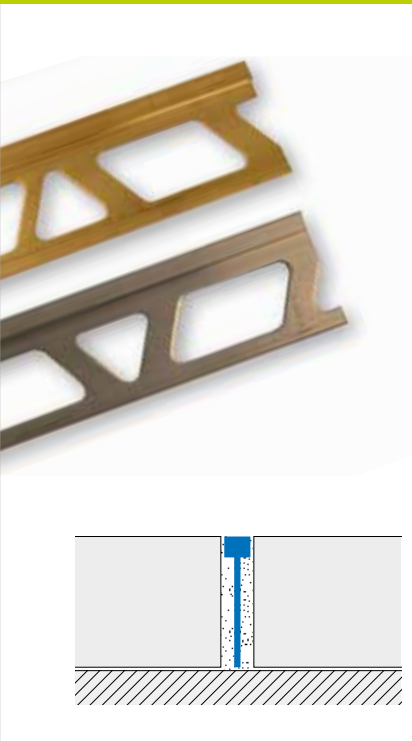

linetec MB

LINETEC MB decorative profiles are installed on site in mortar bed applications. Its perforated flange deeply inserted into the mortar guarantees a secure grip between the two adjacent surfaces. It is commonly used with natural stone flooring to decoratively segment the floor surface. Available in brass and aluminum, both the 3/16" (5mm) and 3/8" (10mm) profile widths can be ground and polished on site.



LINETEC MB-ON Natural Brass

Due to its unique shape and intrinsic qualities of the material, this brass profile guarantees resistance to chemical and mechanical stress and wear. It is used indoors and outdoors, particularly suitable for areas with heavy, industrial traffic as well as for elegant residential detailing. Moisture and corrosive agents may oxidize the exposed surfaces. Buffing the profile with conventional polisher will bring back its shine in no time.

LINETEC MB 5 AN Natural Aluminum

This profile is produced in conformity with UNI standards. It has limited mechanical and chemical resistance. During installation, excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change color or darken over time. Brass profiles are recommended for outdoors and high traffic areas.

	BxH = in	mm	Art.		
Material:	3/16x1	5x25	MB	5	ON
Extruded Brass	3/8x1	10x25	MB	10	ON
Finish: Natural (ON)					
Length: 8'10" (2.70meters)					
Width: 3/16" to 3/8" (5mm to 10mm)					

Material:	3/16x1	5x25	MB	5	AN
Extruded Aluminum					
Finish: Natural (AN)					
Length: 8'10" (2.70meters)					
Width: 3/16" (5mm)					