


Patented coplanar joint profile. The innovative, ingenious clip system in Resinil (thermoplastic synthetic resin) allows, by simple rotation, to compensate level differences of up to 1/16" (1.5 mm). The system used with (base) **CLB60ANF** and (clip) **CL40P** can also join floors with thicknesses varying from 5/32" to 1/4" (4 to 6 mm). It additionally acts as a movement joint profile, since the internal cavity allows the underlying flooring to move up to ± 3/32" (± 2 mm).



multiclip_{LVT} CLG 260

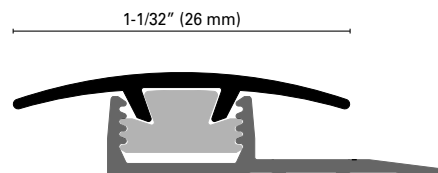

MULTICLIP – LVT CLG 260 A* Anodized Aluminum

Aluminum anodized in silver, gold and bronze, the profiles are particularly versatile and can be matched with all floor surfaces.

Assemble with Clip **CL 40 P** + Aluminum base **CLB 60 ANF**.

	Art.		Finish
Material:	CLG 260	AS	Silver
Extruded Anodized Aluminum	CLG 260	AO	Gold
Length: 8' 10" (2.70 meters)	CLG 260	AB	Bronze
⊙: 35-7/16" (0.90 m)			

MULTICLIP – LVT CLG 260* High Resistance Wood Laminated Aluminum

Highly resistant wood effect aluminum profiles, with elevated resistant to abrasion, similar to that of tiled surfaces. The elegant and uniform wood covering is also resistant to stains.

Assemble with Clip **CL 40 P** + Aluminum base **CLB 60 ANF**.

The covering is resistant to tear and chemicals agents.

Material:	CLG 260	AC	Maple
Extruded wood laminated Aluminum	CLG 260	CI	Cherry
	CLG 260	FA	Beechwood
Length: 8' 10" (2.70 meters)	CLG 260	NC	Light Walnut
⊙: 35-7/16" (0.90 m)	CLG 260	NS	Dark Walnut
	CLG 260	RO	Oak
	CLG 260	RD	Decapé Oak
	CLG 260	RG	Grey Oak
	CLG 260	RG	Bleached Oak
	CLG 260	RW	Wengé Oak
	CLG 260	WE	Wengé