




The **ROUNDTEC** profile is mainly used in transitioning floor types of different thicknesses, for example from ceramic tile to thin linoleum. Its rounded section provides a smooth level change of 1/8" (3mm), making it suitable between two floor types or as an end profile. **ROUNDTEC** can even be used as stair nosing or edging for tile countertops. Available in brass with patented dovetail anchoring.

## roundtec RD



(RD 100 O\*)

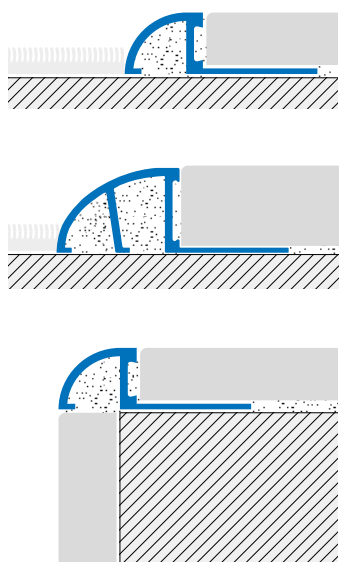

### ROUNDTEC RD-O\* Brass

Due to its unique shape and intrinsic qualities of the material, this brass profile guarantees resistance to chemical and mechanical stress and wear. It is used indoors and outdoors, particularly suitable for areas with heavy, industrial traffic as well as for elegant residential detailing. Moisture and corrosive agents may oxidize the exposed surfaces. Buffing the profile with conventional polisher will bring back its shine in no time.

Available in natural brass (ON) or polished brass (OL).

	H = in	mm	Art.		
Material:	5/16	8	RD	80	ON/OL
Extruded Brass	3/8	10	RD	100	ON/OL
Finish*: Natural (ON), Polished (OL)	1/2	12.5	RD	125	ON/OL
	9/16	15	RD	150	ON/OL
Length: 8'10" (2.70meters)					