


stairtec FO

STAIRTEC FO protects ceramic tile and wood stair edges with a technical, grooved, non-slip tread.

It is used to substitute ceramic stair nosing elements. Suitable for residential and commercial applications, the grooved top surface elegantly enhances the safety features of this profile. Available in aluminum, stainless steel and brass with patented vertical dovetail anchoring.

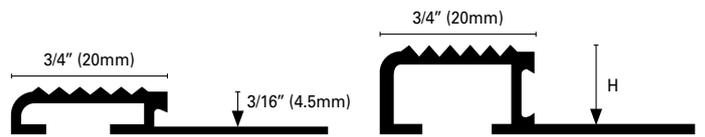

(FO 45* - FO 100*)


Note: Stainless steel version has a slightly different section



FOTA IS



FOTI IS

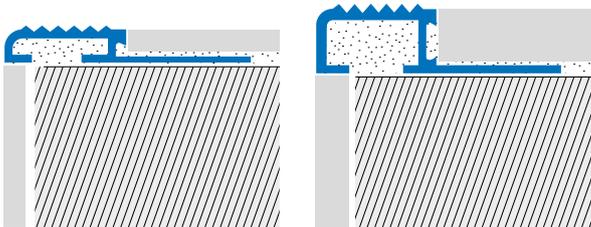

STAIRTEC FO-AS Silver Anodized Aluminum

This profile has a silver coating, suitable for both indoor and outdoor application with high resistance to weathering and lower resistance to mechanical impact. During installation, excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change color or darken over time. Brass profiles are recommended outdoors and in places of high stress and wear.

STAIRTEC FO-O* Extruded Brass

This brass profile is produced with first grade raw material, guaranteeing resistance to chemical and mechanical stress and wear. It is particularly suitable for areas with heavy, industrial traffic as well as for residential applications. Moisture and corrosive agents may oxidize the exposed surfaces. Buffing the profile with conventional polisher will bring back its shine in no time. Available in Natural Brass (ON) and Polished Brass (OL).

STAIRTEC FO-IL* Stainless Steel

Suitable for indoor and outdoor applications, this stainless steel profile ensures excellent resistance to corrosion, recommended for food processing plants, hospitals, laboratories and public toilets.

	H = in	mm	Art.		
Material:	3/16*	4.5*	FO	45	AS
Extruded Anodized Aluminum	5/16*	8*	FO	80	AS
Finish: Silver (AS)	3/8*	10*	FO	100	AS
	1/2*	12.5*	FO	125	AS
Length: 8'10" (2.70meters)					
Improved anchoring on the vertical side					
End caps: FOTA* IS					
☒ "ultra-thin" line					

Material:	3/8	10	FO	100	ON/OL
Extruded Brass	1/2	12.5	FO	125	ON/OL
Finish: Natural (ON), Polished (OL)					
Length: 8'10" (2.70meters)					

Material:	3/8*	10*	FO	100	IL
Stainless Steel AISI 304	1/2*	12.5*	FO	125	IL
Finish: Polish (IL)					
Length: 8'10" (2.70meters)					
End caps: FOTI* IS					