






STAIRTEC SM is a stair nosing profile made in aluminium or brass with an anti-skid rubber grooved or flat smooth insert. It is truly ideal for protection and as a safety measure of stair steps with carpet or rubber covering.

stairtec SM

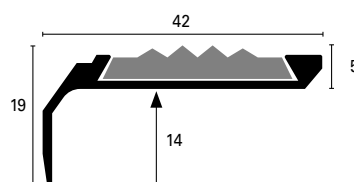

Installation:

- Cut the aluminum profile.
- Install the profile on the floor using screws (put the screws in the groove where the plastic insert is then applied).
- Cut the insert to size.
- Apply the cut insert to the profile pressing the ends and then releasing them (so the screws will be invisible).



STAIRTEC SM 14 A*N Extruded anodised aluminium

This anodised aluminium profile is supplied in Silver (ASN), Gold (AON) and Bronze (ABN) finish.

It is tolerant to oxidation.

Anti-slip insert SMI, SML not included (see next page).

	BxH	Art.		
Material: Extruded anodised aluminium	42x14	SM	14	ASN
Finish*: Silver (ASN), Gold (AON), Bronze (ABN)	42x14	SM	14	ABN
Length: 2,70 metres				

STAIRTEC SM 14 OLN Polished extruded brass

Solid brass profile, guarantees an excellent resistance to mechanical and chemical impacts, while conveying a long lasting "classic" finish.

Material: Extruded brass	42x14	SM	14	OLN
Finish: Polished (OLN)				
Length: 2,70 metres				

STAIRTEC SMI / SML Rubber anti-slip insert

Synthetic rubber insert – SML for smooth top, SMI for grooved top.


SMI - Grooved version					
	mm	Art.			Colours
Material: Resinflex	28	SMI	28	P23	Grey
	28	SMI	28	P32	Dark beige
Membrane roll length: 20 m	28	SMI	28	P51	Black
Width: 28 mm					

SML - Smooth version					
	mm	Art.			Colours
Material: Resinflex	28	SML	28	P23	Grey
	28	SML	28	P32	Dark beige
Membrane roll length: 20 m	28	SML	28	P51	Black
Width: 28 mm					




stairtec SM

STAIRTEC SM is a stair nosing profile made in aluminium or brass with an anti-skid rubber grooved or flat smooth insert. It is truly ideal for protection and as a safety measure of stair steps with carpet or rubber covering.

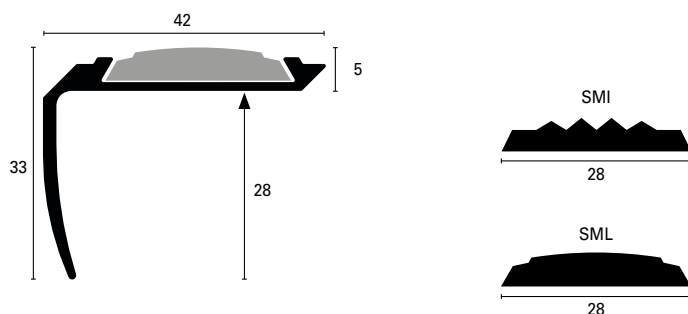

Installation:

- Cut the aluminum profile.
- Install the profile on the floor using screws (put the screws in the groove where the plastic insert is then applied).
- Cut the insert to size.
- Apply the cut insert to the profile pressing the ends and then releasing them (so the screws will be invisible).



STAIRTEC SM 28 A*N Extruded anodised aluminium

Profiles in anodised aluminium available in Silver (ASN), Gold (AON) or Bronze finish (ABN).

To be installed with the anti-slip infill grooved (SMI) or smooth (SML).

	BxH	Art.		
Material:	42x28	SM	28	ASN
Extruded anodised aluminium	42x28	SM	28	AON
Finish*: Silver (ASN), Gold (AON), Bronze (ABN)	42x28	SM	28	ABN
Length: 2,70 metres				

STAIRTEC SMI / SML Rubber anti-slip insert

Synthetic rubber insert – SML for smooth top, SMI for grooved top.

SMI - Grooved version

	mm	Art.			Colours
Material: Resinflex	28	SMI	28	P23	Grey
Membrane roll length: 20 m	28	SMI	28	P32	Dark beige
	28	SMI	28	P51	Black
Width: 28 mm					

SML - Smooth version

	mm	Art.			Colours
Material: Resinflex	28	SML	28	P23	Grey
Membrane roll length: 20 m	28	SML	28	P32	Dark beige
	28	SML	28	P51	Black
Width: 28 mm					