


trimtec SR


TRIMTEC SR is especially recommended for finishing the perimeter of ceramic floors, particularly when they abut a vertical surface. It is also used as stair nosing and trimming in balconies and exit ways. TRIMTEC SR profiles have an extended vertical edge to cover and protect border surfaces and prevent future cracking.

Its unique sectional design allows the use of two different floor thicknesses with the same reversible profile.

The aluminum section is designed with vertical dovetail anchoring.

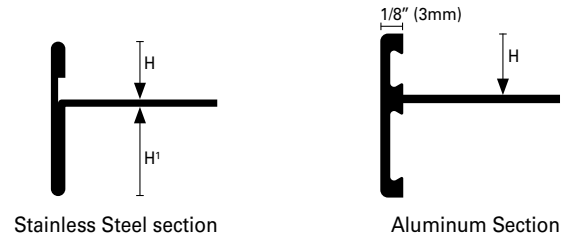

(SR 8/15*)

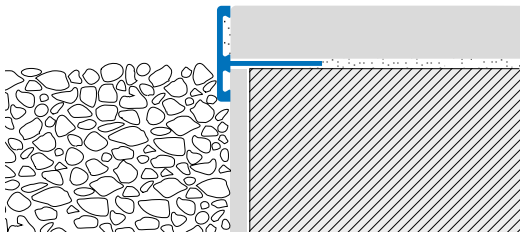

TRIMTEC SR-O* Extruded Brass

This brass profile is produced with first grade raw material, guaranteeing resistance to chemical and mechanical stress and wear. It is particularly suitable for areas with heavy, industrial traffic as well as for domestic use. Moisture and corrosive agents may oxidize the exposed surfaces. Buffing the profile with conventional polisher will bring back its shine in no time.

Available in natural brass (ON) or polished brass (OL).

TRIMTEC SR-AS Silver Anodized Aluminum

This profile has a silver coating and is suitable for both indoor and outdoor application with high resistance to weathering and lower resistance to mechanical impact. During installation, excess adhesive and grout should be removed immediately to avoid stains. The exposed surface may change color or darken over time. Brass or stainless steel profiles are recommended in places of high wear and use.

TRIMTEC SR-I* Stainless Steel AISI 304 - DIN 1.4301

This stainless steel profile ensures high resistance to most diluted chemicals found in laboratories and aggressive detergents present in food processing plants, commercial kitchens, slaughter houses, breweries, public toilets and hospitals.

Available in polished stainless steel (IL), brushed (IS) or sanded (IX).

CURVELINE

TRIMTEC TR series is also available with a specially-cut flange that allows shaping for curved edges and inlays. To order: add the letter D to the product code.

	H = in	mm	Art.		
Material:	5/16 / 9/16	8 / 15	SR	8/15	ON/OL
Extruded Brass	3/8 / 1/2	10 / 12.5	SR	10/12	ON/OL
Finish*: Natural (ON), Polished (OL)					
Length: 8'10" (2.70meters)					

Material:	5/16 / 9/16	8 / 15	SR	8/15	AS
Extruded Anodized Aluminum	3/8 / 1/2	10 / 12.5	SR	10/12	AS
Finish: Silver (AS)					
Length: 8'10" (2.70meters)					

Material:	5/16 / 9/16	8 / 15	SR	8/15	IL/IS
Stainless Steel AISI 304	3/8 / 1/2	10 / 12.5	SR	10/12	IL/IS
Finish*: Polished (IL), Brushed (IS)					
Length: 8'10" (2.70meters)					

