





# zerotec ZR60

**Zerotec ZR60** has been designed to optimize transitions between tile and carpet, rugs or other floor coverings such as wood, PVC and laminates; thresholds typically found in public spaces, like hotels and restaurants. Its delicate line and gradual inclination allow a smooth transition between different floor levels: from 5/16" - 8 mm, 3/8" - 10 mm and 1/2" - 12.5 mm tile to an adjacent floor covering with a thickness of 6 mm, excellent for modern and elegant interior detailing.

The profile's unique shape hides and protects the edge of the thin flooring below (1/4" - 6 mm thickness) from mechanical impact, hiding imperfections while preventing damage caused by passage and wear.

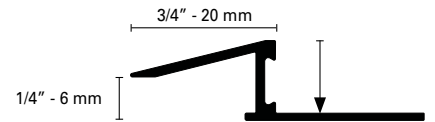

(ZR 60/100 AS)

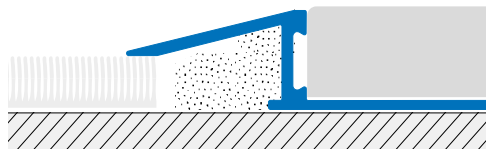

### ZEROTEC ZR60/\*AS Silver Anodized Aluminum

Profile available in anodized aluminum with a silver surface finish (AS). Designed to optimize the transition from tile to carpeting, rugs and other floor coverings such as laminates, wood and PVC.

	H = in	H = mm	Art.		
Material:	5/16	8	ZR60	/80	AS
Extruded Anodized Aluminum	3/8	10	ZR60	/100	AS
Finish: Silver (AS); Titanium (AT)	1/2	12.5	ZR60	/125	AS
	3/8	10	ZR60	/100	AT
Length: 8' 10" (2.70 meters)					

ADA compliant products