

SHOWERTEC STKR

positive profile

SHOWERTEC STKR

PRODUCT DESCRIPTION



The SHOWERTEC STK range includes a series of profiles dedicated to the shower area. They are products designed to simplify the installation phase. STKR profiles act as a transition between the sloping tiled shower tray and the cladding. The latter can be combined with its STKF front profile to obtain a homogeneous and optimal finish thanks to the clean line of the installation. The Showertec STK profiles create bathroom environments with a minimalist and modern design, obtaining floor-level showers without obstacles and without architectural barriers.

Available in right and left version.

They can be combined with the frontal profile STKF to obtain a clean and minimal design.

Showertec STKR

TECHNICAL FEATURES

Lenghts: 1,35 m - 2,00 m

| | | | Article | HxB mm | Material | Finish | Pc |
|--|-------------|----|-------------------|---------|-----------------|---------|----|
| | | | STKR35/80IS135DX | 8x35 | Stainless Steel | Brushed | 1 |
| | | | STKR35/80IS135SX | 8x35 | Stainless Steel | Brushed | 1 |
| | | IS | STKR35/100IS135DX | 10x35 | Stainless Steel | Brushed | 1 |
| | | | STKR35/100IS135SX | 10x35 | Stainless Steel | Brushed | 1 |
| | | | STKR35/125IS135DX | 12,5x35 | Stainless Steel | Brushed | 1 |
| | Bmin = 8 mm | | STKR35/125IS135SX | 12,5x35 | Stainless Steel | Brushed | 1 |
| | | | STKR48/80IS200DX | 8x48 | Stainless Steel | Brushed | 1 |
| | SLOPE = 2% | | STKR48/80IS200SX | 8x48 | Stainless Steel | Brushed | 1 |
| | | | STKR48/100IS200DX | 10x48 | Stainless Steel | Brushed | 1 |
| | | | STKR48/100IS200SX | 10x48 | Stainless Steel | Brushed | 1 |
| | | | STKR48/125IS200DX | 12,5x48 | Stainless Steel | Brushed | 1 |
| | | | STKR48/125IS200SX | 12,5x48 | Stainless Steel | Brushed | 1 |

APPLICATION


- 1. Cut the profile STKR at the desired length;
- 2. Apply the tile adhesive to the surface where the profile will be laid and position it by pressing it so that it is embedded in;
- 3. Lay the tiles spreading the adhesive over the entire surface using the full bed technique and taking care to leave a 2mm joint;
- 4. Clean any glue residue from the profile before it dries;
- 5. Grout carefully covering all the joints and clean the profile of all residues before they dry.

CLEANING AND MAINTENANCE

Do not use abrasive detergents for cleaning. The profile does not require any particular care or maintenance.

Profilitec Corp. 472 Meeting Street, Suite C, No. 301 -Charleston, SC 29403, USA Ph: +1 855 290 9591 e-mail: customerservice@profilitec.com



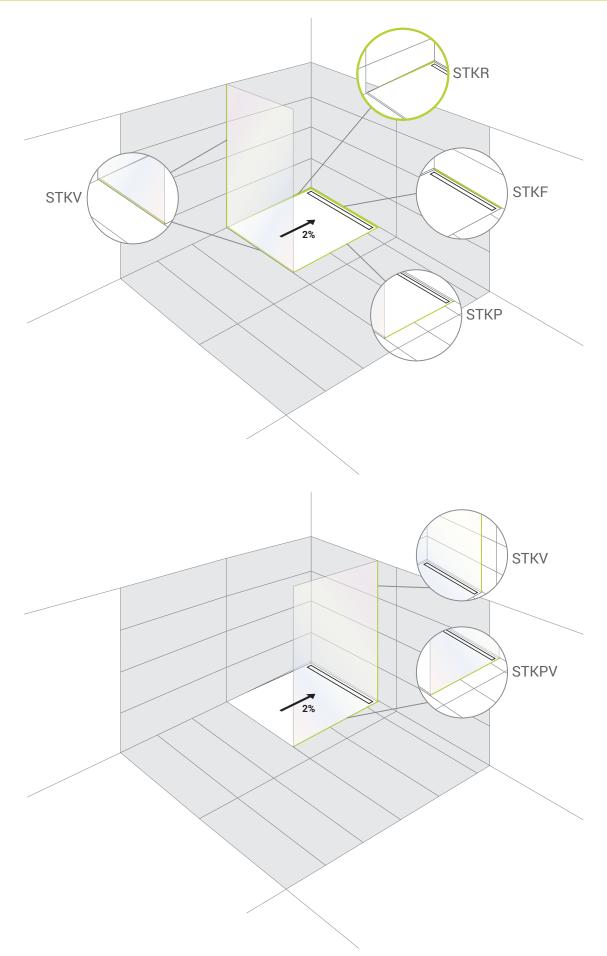

Profilitec S.p.A. Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY Tel: +39 0444 268311 e-mail: profilitec@profilitec.com (ITA) Profilitec Corp. 472 Meeting Street, Suite C, No. 301 -Charleston, SC 29403, USA Ph: +1 855 290 9591 e-mail: customerservice@profilitec.com

