



SAFETY SYSTEM ZEROFLEX

PRODUCT DESCRIPTION

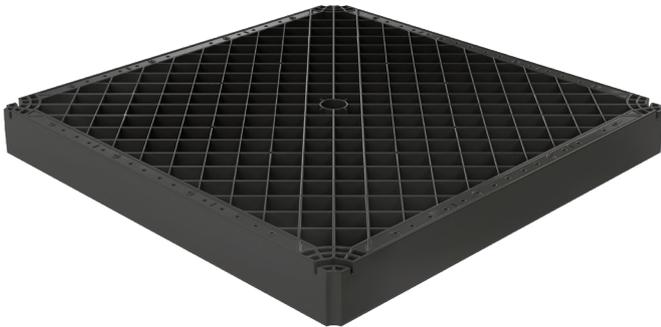

The SUPATRAY ZeroFlex grid redefines raised outdoor flooring, offering a solid modular substructure free from design constraints. Made from high-quality polypropylene and measuring 23-1/2" x 23-1/2" - 598 x 598 mm, it connects precisely using dedicated locking discs to create a solid, stable, and perfectly integrated surface.

TECHNICAL FEATURES

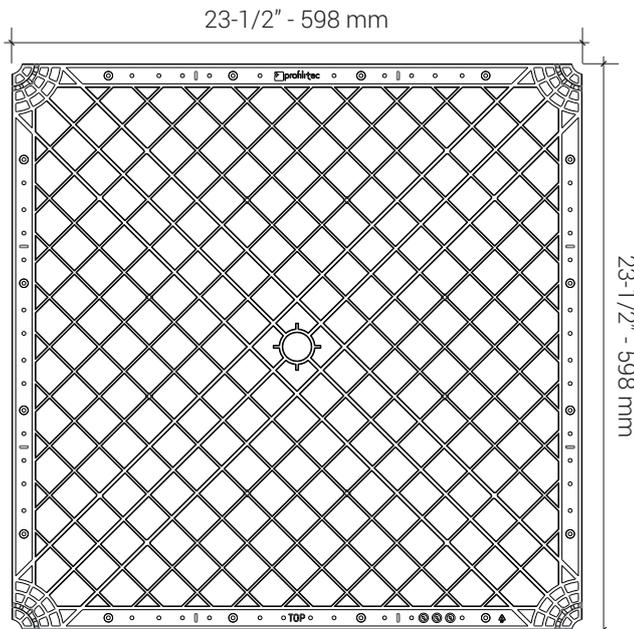


Thickness = 2-3/8" - 64 mm



uptec SUPATRAYZF >> ZeroFlex safety grid			
Item	Material	Environmental impact	pcs/pck
SUPATRAYZF	Polypropylene	Recyclable - non-hazardous waste	64
SUPATRAYZFSET2	Polypropylene	Recyclable - non-hazardous waste	2

Locking elements for ZeroFlex safety grid			
Item	Material	Environmental impact	pcs/pck
SUPATRAYGRIP2SET24	Natural aluminum	Recyclable - non-hazardous waste	24
SUPATRAYGRIP4SET24	Natural aluminum	Recyclable - non-hazardous waste	24
SUPATRAYGRIP2	Natural aluminum	Recyclable - non-hazardous waste	240
SUPATRAYGRIP4	Natural aluminum	Recyclable - non-hazardous waste	240

uptec SUPATRAYTAB >> Flaps for ZeroFlex safety grid			
Item	Material	Environmental impact	pcs/pck
SUPATRAYTAB2SET24	Rubber	Recyclable - non-hazardous waste	24
SUPATRAYTAB4SET24	Rubber	Recyclable - non-hazardous waste	24
SUPATRAYTAB2	Rubber	Recyclable - non-hazardous waste	240
SUPATRAYTAB4	Rubber	Recyclable - non-hazardous waste	240

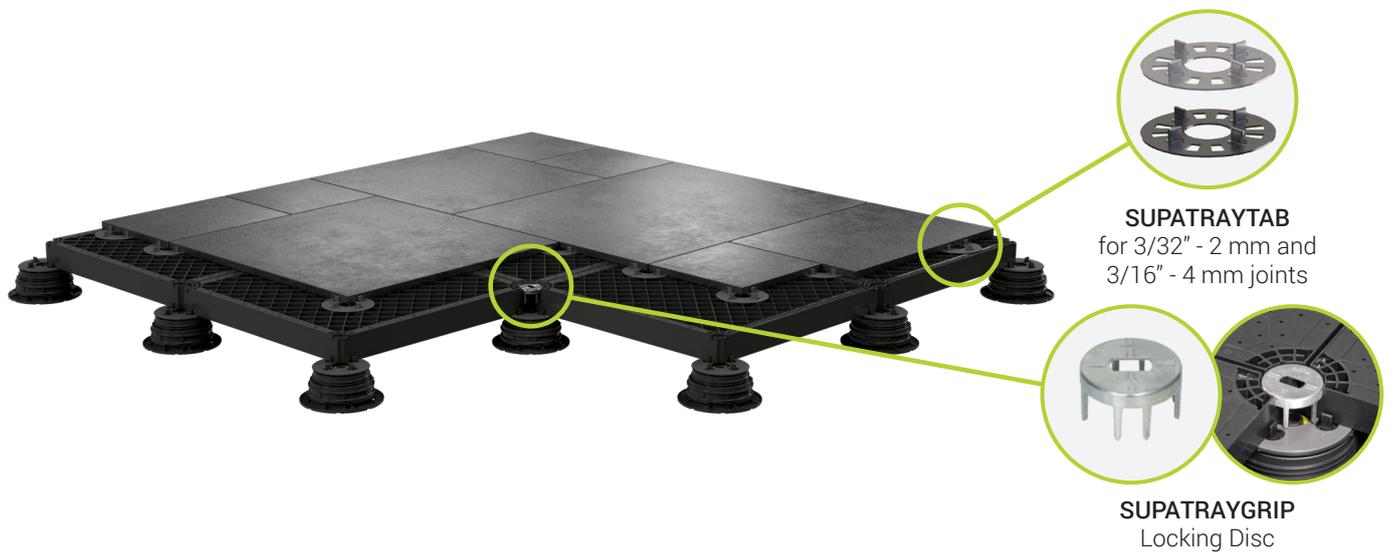

ADVANTAGES



High load resistance

It can withstand extremely heavy loads, ensuring solid, stable, and safe flooring even in the busiest areas.



Minimum flex

The structure ensures minimal flex and deformation, guaranteeing extremely stable walking conditions with any tile format.



No central pedestal required

The high structural strength eliminates the need for additional reinforcement pedestals, simplifying installation and reducing costs and installation times.



Maximum security

Protects against injuries in the event of tile breakage.



Maximum design freedom

It allows for the installation of tiles of any size or the combination of different types of coverings, for a completely customizable design without limits.



Quick and intuitive installation

It guarantees fast, accurate, and smooth assembly, optimizing the installation phases.



Easy maintenance

Removable and can be inspected at any time, allowing immediate access to the surface below for quick and clean repairs.



Sustainable and durable

Made from recycled polypropylene and 100% recyclable, resistant to atmospheric agents and wear, it combines high performance with respect for the environment.

Profilitec S.p.A.
Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
Tel: +39 0444 268311
e-mail: profilitec@profilitec.com

Profilitec Corp.
e-mail: customerservice@profilitec.com

Profilitec Ibérica, S.L.U.
e-mail: iberica@profilitec.com

Profilitec Canada, LTD.
e-mail: customerservice@profilitec.com

Profilitec France
e-mail: france@profilitec.com

INSTALLATION

- 1. Installing the uptec pedestals:** Begin by placing the pedestals on your installation surface and adjusting them to your preferred height.
- 2. Assembling the substructure:** Next, position the trays on top of the pedestals, ensuring they align with the pedestals' tabs. Achieve precise leveling of the trays using the adjustment key **SUPAK**.
- 3. Flooring installation:** Now, install your choice of flooring elements, such as porcelain, stoneware or marble. Be sure to place the **SUPATRAYTAB** beneath the corners, serving the dual purpose of creating gaps and aligning the flooring elements. Fine height adjustments are still possible after full installation using the system's **SUPAK** key.

ACCESSORIES



SUPATRAYTAB



SUPATRAYGRIP

Profilitec S.p.A.
Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
Tel: +39 0444 268311
e-mail: profilitec@profilitec.com

Profilitec Corp.
e-mail: customerservice@profilitec.com

Profilitec Ibérica, S.L.U.
e-mail: iberica@profilitec.com

Profilitec Canada, LTD.
e-mail: customerservice@profilitec.com

Profilitec France
e-mail: france@profilitec.com