

SUPAANG240

PRODUCT DESCRIPTION



SUPAANG240


SUPAANG240 is an aluminum joist that guarantees stability and aesthetic versatility for raised floor installations. SUPAANG240 offers freedom and flexibility in terms of tile dimensions, tile laying patterns, and flooring materials that can be used for raised floor installations. It can be used in combination with Uptec supports and Uptec Ground (3/16" tabs).

The upper part is equipped with two special rails in which anti-slip and anti-noise rubber gaskets are inserted. The joist is supplied with the rubber pre-applied, saving installers valuable time and ensuring a quick and easy installation.

The lower part includes openings that ensure perfect water outflow and allow for height adjustment during and possibly after installation. Additionally, the dented geometry of the openings ensures a secure and stable attachment to the head of the support during installation.

TECHNICAL DRAWINGS

Length: 7'10-1/2"

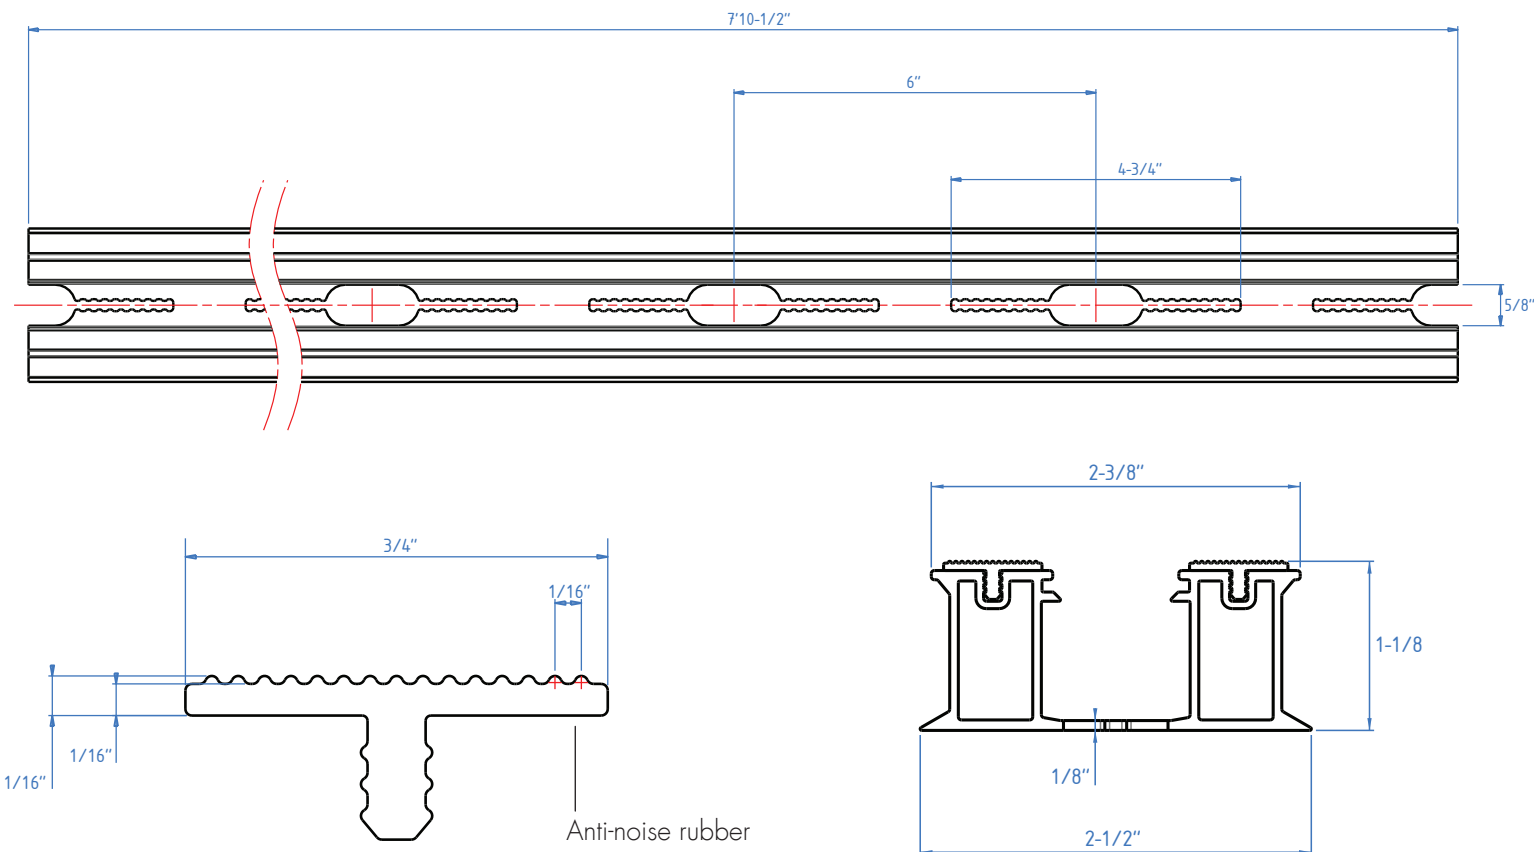

APPLICATION

1. Place and adjust the uptec support to the desired height by choosing the SUPA4 head;
2. Lay the joist on top of the uptec support; embedding it into the 3/16" spacer tabs;
3. Make the final millimeter adjustments with the SUPAK key by taking advantage of the holes in the base of the joist;
4. Place SUPDG spacer or SUPCLIPG depending on the type of covering material to be installed;
5. Lay the flooring.

TECHNICAL FEATURES - SUPAANG240

| Art. | Material | Finish | Dimensions mm | Dimensions inch | Weight | Environmental impact |
|-------------|-------------|-------------------------|---------------|-----------------------------------|------------|----------------------------------|
| SUPAANG240 | T6 Aluminum | Natural aluminum | 60x27,5x2400 | 2-3/8" x 1-1/8" x 7'10-1/2" | 4.9 Pounds | Recyclable - non-dangerous waste |
| SUPAANGB240 | T6 Aluminum | Black anodized aluminum | 60x27,5x2400 | 2-3/8" x 1-1/8" x 7'10-1/2" | 4.9 Pounds | Recyclable - non-dangerous waste |

PACKAGING

Package: 6 pcs

Package weight: 24.5 Pounds

WARNINGS

SUPAANG240 Uptec and joist supports are designed to support raised floors intended for foot traffic only. They cannot be subjected to vibrating machinery and equipment. This also includes cars, maintenance vehicles and other similar equipment.

ACCESSORIES

- SUPAJG JOINT
- SUPDG
- SUPCLIPG
- SUPACLPT

Profilitec S.p.A.
Via Scotte, 3 - 36033 Isola Vicentina (Vicenza), ITALY
Tel: +39 0444 268311
e-mail: profilitec@profilitec.com

Profilitec Corp.
472 Meeting Street, Suite C, No. 301 -
Charleston, SC 29403, USA
Ph: +1 855 290 9591
e-mail: customerservice@profilitec.com

 **profilitec**
positive profile