

MULTICLIP CLP


PRODUCT DESCRIPTION



The patented MULTICLIP CLP 270 aluminum perimeter profile allows floor edge finishing without baseboards. A 5/8" (16mm) internal cavity allows 3/16" (5mm) of differential movement. This profile is also suitable along sliding door tracks and as entrance mat framing.

TECHNICAL FEATURES

Length: 2.70 meters - 8'10"

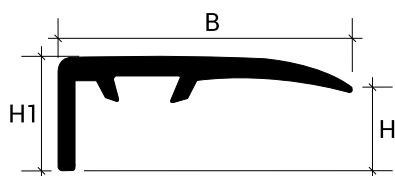

Aluminum

H1 = 3/8" - 10 mm

1 clip - H = 1/4" to 3/8" - 6 to 10 mm

2 clip - H = 7/16" to 5/8" - 11 to 15 mm

3 clip - H = 5/8" to 3/4" - 16 to 20 mm

MATERIAL DESCRIPTION

Aluminum

The primary aluminum alloy EN AW-6060 in T6 temper is suitable for complex extrusions, offering high strength and an excellent natural surface finish that lends itself well to subsequent finishing processes.

ANODIZED ALUMINUM:

The anodic oxidation process provides protection against corrosion caused by atmospheric agents, without involving galvanic treatments.

According to the EN 12373 standard, the profiles are treated with preventive processes that make them uniformly opaque, subsequently they are coloured through an electro-chemical oxidation process in the standard colours Silver, Gold, Bronze, Copper and Titanium with a thickness of up to 10 microns.

SUBLIMATED ALUMINUM:

The finish obtained through the painting and sublimation process is a process that consists of a first phase corresponding to the powder coating process and a second phase that uses sublimation transfer technology. This allows images or decorations to be transferred from a film to an object, usually metal, using heat and pressure, creating a high-quality and durable aesthetic finish.

In addition to presenting realistic decorative effects, it also retains the characteristics of an electrostatic painting based on polyester powders.



multiclip >> CLP270 in Anodized Aluminum		
Item	B inch	Finish
CLP270AS270	1-1/16	AS - Silver
CLP270AO270	1-1/16	AO - Gold
CLP270AB270	1-1/16	AB - Bronze

multiclip >> CLP270 in High resistance Wood Laminated Aluminum		
Item	B inch	Finish
CLP270RS270	1-1/16	RS - Bleached
CLP270AC270	1-1/16	AC - Maple
CLP270FA270	1-1/16	FA - Beechwood
CLP270RO270	1-1/16	RO - Oak
CLP270CI270	1-1/16	CI - Cherry
CLP270NC270	1-1/16	NC - Light Walnut
CLP270NS270	1-1/16	NS - Dark Walnut
CLP270WE270	1-1/16	WE - Wengè
CLP270RW270	1-1/16	RW - Wengè Oak
CLP270RD270	1-1/16	RD - Decapè Oak
CLP270RG270	1-1/16	RG - Grey Oak

APPLICATION

1. Choose the MULTICLIP profile (finishing), the CLB profile (base) and the CL profile (adjustment clip);
2. Cut the profiles to the desired length;
3. Spread the adhesive in the application area of the base or fix it with screws;
4. Lay the floors by resting them on the sides of the base, leaving the space that will house the CL profile (clip) free;
5. Insert the CL profile into the appropriate dovetail slot of the MULTICLIP finishing profile;
6. Finally, fit the newly coupled profiles (MULTICLIP + CL) into the base (CLB) by applying progressively greater pressure, for example by placing a wooden board on the profile and hitting it lightly with a rubber hammer.

N.B.: Aluminum profiles offer limited resistance to alkaline substances, so their use must be evaluated according to the expected chemical aggressions. Aluminum profiles in contact with cementitious substances can be attacked by corrosion processes, so residues of adhesives and sealants used must be removed immediately. When laying, the right amount of adhesive must be used and the right drying times observed, avoiding creating cavities in which water can stagnate, which would lead to the formation of alkaline substances (aluminum hydroxide) and trigger corrosive electrolytic phenomena.

CLEANING AND MAINTENANCE

ALUMINIUM:

Aluminum requires no special maintenance.

For cleaning, use colorless alcohol diluted in water or neutral detergents, avoiding acidic ones (e.g., hydrochloric or hydrofluoric acid); use non-abrasive sponges or cloths to avoid damage. We recommend not applying cleaners directly to surfaces. After cleaning, rinse with water and dry immediately with a soft cloth. Avoid polishes. Quickly remove residual cement or grout to protect the surface.

WARNINGS

These profiles should be handled with care, using cut-resistant gloves. The indications and prescriptions herein, while corresponding to our experience, are to be considered purely indicative and must be confirmed by exhaustive practical applications. Profilitec declines any responsibility for any damage to people or things resulting from improper use of the products. The user is required to determine whether or not the product is suitable for use and assumes all responsibility arising from incorrect installation of the material.

BILL OF QUANTITIES ITEM

Supply and installation of profile in _____ (material), with finish _____
 _____ (see Material Description section) of characteristic size _____ mm. Profile system
 consisting of a base, connecting clip and covering and finishing profile for the perimeter floor.

Family type _____ from the Profilitec company as a joining, connection and finishing profile between floors,
 even of different thicknesses, to be supplied and installed properly, following the methods and fields of application
 suggested by the manufacturer.

Profile length: 2700 mm

Profile SKU: _____

Material: _____ \$/pc

Installation: _____ \$/pc

Totale price: _____ \$/pc